

TRANSMITTAL LETTER TO THE UNITED STATES

DESIGNATED/ELECTED OFFICE (DO/EO/US)

CONCERNING A FILING UNDER 35 U.S.C. 371

RCA88682

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/445135

INTERNATIONAL APPLICATION NO.

PCT/US98/11636

INTERNATIONAL FILING DATE

05 June 1998

PRIORITY DATE CLAIMED

06 June 1997

TITLE OF INVENTION

SYSTEM AND METHOD FOR SORTING PROGRAM GUIDE INFORMATION

APPLICANT(S) FOR DO/EO/US

Darrel Wayne Randal, Daniel Richard Schneidewand, Michael Joseph McLane, Megan Louise Brown
and Mark Sheridan Westlake

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 18 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98. *w/ three refs.*
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☒ Certificate of Mailing by Express Mail
19. ☒ Other items or information: *Return Receipt Postcard*

09/445135

PCT/US98/11636

RCA88682

20. The following fees are submitted..

CALCULATIONS PTO USE ONLY

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☒ Search Report has been prepared by the EPO or JPO **\$840.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) **\$670.00**
- ☐ No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) **\$760.00**
- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO **\$970.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) **\$96.00**

ENTER APPROPRIATE BASIC FEE AMOUNT =**\$840.00**Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	13 - 20 =	0	x \$18.00
Independent claims	3 - 3 =	0	x \$78.00

\$0.00**\$0.00**Multiple Dependent Claims (check if applicable). ☐**\$0.00****TOTAL OF ABOVE CALCULATIONS =****\$840.00**Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐**\$0.00****SUBTOTAL =****\$840.00**Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).**\$0.00****TOTAL NATIONAL FEE =****\$840.00**Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐**\$0.00****TOTAL FEES ENCLOSED =****\$840.00**

Amount to be:	\$
refunded	
charged.	\$

- ☐ A check in the amount of _____ to cover the above fees is enclosed.
- ☒ Please charge my Deposit Account No. **07-0832** in the amount of **\$840.00** to cover the above fees.
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **07-0832** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Joseph S. Tripoli - Patent Operations
Thomson multimedia Licensing Inc.
PO Box 5312, 2 Independence Way
Princeton, NJ 08543-5312

SIGNATURE

Frank Y. Liao

NAME

40065

REGISTRATION NUMBER

DATE

12/3/99

DOCUMENT PROCESSING
BRANCH

EXP MAIL: EL533648729U

1

9/PRTS

09/445135

418 Rec'd PCT/PTO 03 DEC 1999

SYSTEM AND METHOD FOR SORTING PROGRAM GUIDE
INFORMATION

5

FIELD OF INVENTION

This invention generally relates to the field of program guide information processing and more particularly, to a system and method of sorting program guide information alphabetically.

10

BACKGROUND OF INVENTION

Electronic devices such as televisions and personal computers (PC) require a control system that includes a user interface system. Typically, a user interface provides information to a user and simplifies use of the device. One example of a user interface is an

15

Electronic Program Guide (EPG) in a television system.

An EPG is an interactive, on-screen display feature that displays information analogous to TV listings found in local newspapers or other print media. In addition, an EPG also includes information necessary for collating and decoding programs. An EPG provides information about each program within the time frames covered by the EPG which typically ranges from the next hour up to seven days. The information contained in an EPG includes

20

programming characteristics such as channel number, program title, start time, end time, elapsed time, time remaining, rating (if

25

available), topic, theme, and a brief description of the program's content. EPGs are usually arranged in a two-dimensional table or grid format with time information on one axis and channel information on the other axis.

Unlike non-interactive guides that reside on a dedicated channel and merely scroll through the current programming on the other channels for the next 2 to 3 hours, EPGs allow viewers to select any channel at any time during some period into the future, e.g., up to
5 seven days forward. Further EPG features include the ability to highlight individual cells of the grid containing program information. Once highlighted, the viewer can perform functions pertaining to that selected program. For instance, the viewer could instantly switch to that program if it is currently being aired. Viewers could also
10 program one touch video cassette recording (VCR) or the like if the television is properly configured and connected to a recording device. Such EPGs are known in the art and described, for instance, in US Pat. Nos. 5,353,121; 5,479,268; and 5,479,266 issued to Young et al. and assigned to StarSight Telecast, Inc.

15 In addition, US Pat. No. 5,515,106, issued to Chaney etc., and assigned to the same assignee of the present invention, describes in detail an exemplary embodiment including data packet structure necessary to implement an exemplary program guide system. The exemplary data packet structure is designed so that both the channel
20 information (e.g., channel name, call letters, channel number, type, etc.) and the program description information (e.g., title, rating, star, etc.) relating to a program may be transmitted from a program guide database provider to a receiving apparatus efficiently.

User interfaces such as EPGs are applicable to analog and
25 digital television systems and to other electronic devices such as personal computers. As electronic devices become increasingly complex with a multitude of features, the need for a robust and easy-to-use user interface becomes ever more important. For example,

separate electronic systems having respective interfaces for
controlling features of each system are now being combined into a
5 single system requiring a single user interface. One specific example
is the so-called PCTV which includes features of both a personal
computer and a television. The user interface system for such a
device must provide both clear communication of computer and
television related information and provide for simple control of both
10 computer and television related features.

One problem with the current EPG system is that the
program guide is typically provided in a fixed format (i.e., in a two-
dimensional grid format with time information on one axis and
channel information on the other axis, as described above). The users
15 are not typically provided with ways to customize the program guide
list or to categorize the program guide information.

In particular, one prior system for processing channel guide information
is disclosed, for example, in WO/96/17473. The system disclosed allows a user
20 to enter a text string for sorting respective title of programs. The system will
then display the sorted programs with the first program having the title
matching the entered text string. The system does not allow, however, a user
to sort other categories or information related to the programs.

25 SUMMARY OF THE INVENTION

Therefore, the present inventors recognize that it is desirable to be able to
provide a user with sorting capabilities so that the user has great flexibility to
search and display programs. In particular, it would be desirable to provide a
user with an easy and efficient way to search for program based on different
30 program descriptive fields such as, for example, title, star, rating, director or
content of the programs etc.

In accordance with aspects of the present invention, an apparatus and a method are provided for processing channel information containing a respective program description for programs, the method comprising the steps of:

- displaying concurrently a list of program descriptive fields and an entry
- 5 for entering a text string;
- selecting a program descriptive field from the list of program descriptive fields and entering a text string having one or more user-selectable characters in the entry;
- performing an alphabetical sort of the programs based on the entered text
- 10 string and the selected program descriptive field; and
- locating a first program with the respective program description in the selected program description field matching the entered text string.

BRIEF DESCRIPTION OF THE DRAWINGS

15 In the drawing:

Fig. 1 shows an example of a television system suitable for processing program guide information in accordance with the present invention.

20 Fig. 2. shows an example of a digital video processing apparatus suitable for processing program guide information in accordance with the present invention.

Fig. 3 shows a block diagram of a specific implementation of a digital satellite system suitable for processing program guide information in accordance with the present invention.

Fig. 4 shows an example of a program guide being
5 displayed.

Fig. 5 shows a flowchart, in accordance with the present invention for processing user inputs and for sorting program guide information according to the present invention.

Fig. 6 shows another flowchart, in accordance with the
10 present invention for processing user inputs and for sorting program guide information according to the present invention.

Fig. 7 shows an example of a display screen for interfacing with a user of the present invention.

Fig. 8 shows another example of a display screen for
15 interfacing with a user of the present invention.

Fig. 9 shows another example of a user interface screen, including provision for selection of program descriptive field.

DETAILED DESCRIPTION

20 Fig. 1 shows an example of a television system suitable for processing and sorting program guide information in accordance with the present invention. The television receiver shown in Fig. 1 is capable of processing both analog NTSC television signals and internet information. The system shown in FIG. 1 has a first input 1100 for
25 receiving television signal RF_IN at RF frequencies and a second input 1102 for receiving baseband television signal VIDEO IN. Signal RF_IN may be supplied from a source such as an antenna or cable system while signal VIDEO IN may be supplied, for example, by a video

cassette recorder (VCR). Tuner 1105 and IF processor 1130 operate in a conventional manner for tuning and demodulating a particular television signal that is included in signal RF_IN. IF processor 1130 produces baseband video signal VIDEO representing the video
5 program portion of the tuned television signal. IF processor 1130 also produces a baseband audio signal that is coupled to an audio processing section (not shown in FIG. 1) for further audio processing. Although FIG. 1 shows input 1102 as a baseband signal, the television receiver could include a second tuner and IF processor similar to units
10 1105 and 1130 for producing a second baseband video signal from either signal RF_IN or from a second RF signal source.

The system shown in FIG. 1 also includes a main microprocessor (mP) 1110 for controlling components of the television receiver such as tuner 1105, picture-in-picture processing
15 unit 1140, video signal processor 1155, and StarSight® data processing module 1160. As used herein, the term "microprocessor" represents various devices including, but not limited to, microprocessors, microcomputers, microcontrollers and controllers. Microprocessor 1110 controls the system by sending and receiving
20 both commands and data via serial data bus I²C BUS which utilizes the well-known I²C serial data bus protocol. More specifically, central processing unit (CPU) 1112 within mP 1110 executes control programs contained within memory, such as EEPROM 1127 shown in FIG. 1, in response to commands provided by a user, e.g., via IR
25 remote control 1125 and IR receiver 1122. For example, activation of a "CHANNEL UP" feature on remote control 1125 causes CPU 1112 to send a "change channel" command along with channel data to tuner

1105 via I²C BUS. As a result, tuner 1105 tunes the next channel in the channel scan list. Other examples of control programs stored in EEPROM 1127 are software for implementing the operations shown in Figs. 5 and 6 in accordance with the present invention as to be

5 discussed below.

Main microprocessor 1110 also controls the operation of a communications interface unit 1113 for providing the capability to upload and download information to and from the internet.

Communication interface unit 1113 includes, for example, a modem
10 for connecting to an internet service provider, e.g., via a telephone line or via a cable television line. The communication capability allows the system shown in Figure 1 to provide email capability and internet related features such as web browsing in addition to receiving television programming.

15 CPU 1112 controls functions included within mP 1110 via bus 1119 within mP 1110. In particular, CPU 1112 controls auxiliary data processor 1115 and on-screen display (OSD) processor 1117. Auxiliary data processor 1115 extracts auxiliary data such as StarSight[®] data from video signal PIPV.

20 StarSight[®] data which provides program guide data information in a known format is typically received only on a particular television channel and the television receiver must tune that channel to extract StarSight[®] data. To prevent StarSight[®] data extraction from interfering with normal use of the television receiver,
25 CPU 1112 initiates StarSight[®] data extraction by tuning the particular channel only during a time period when the television receiver is usually not in use (e.g., 2:00 AM). At that time, CPU 1112 configures

decoder 1115 such that auxiliary data is extracted from horizontal line intervals such as line 16 that are used for StarSight® data. CPU 1112 controls the transfer of extracted StarSight® data from decoder 1115 via I²C BUS to StarSight® module 1160. A processor internal to the module formats and stores the data in memory within the module. In response to the StarSight® EPG display being activated (e.g., a user activating a particular key on remote control 125), CPU 1112 transfers formatted StarSight® EPG display data from StarSight® module 1160 via I²C BUS to OSD processor 1117.

OSD processor 1117 operates in a conventional manner to produce R, G, and B video signals OSD_RGB that, when coupled to a display device, will produce a displayed image representing on-screen display information such as graphics and/or text comprising an EPG. OSD processor 1117 also produces control signal FSW which is intended to control a fast switch for inserting signals OSD_RGB into the system's video output signal at times when an on-screen display is to be displayed. For example, when a user enables an EPG, e.g., by activating a particular switch on remote control 1125, CPU 1112 enables processor 1117. In response, processor 1117 produces signals OSD_RGB representing the program guide data information previously extracted and already stored in memory, as discussed above. Processor 1117 also produces signal FSW indicating when the EPG is to be displayed.

Video signal processor (VSP) 1155 performs conventional video signal processing functions, such as luma and chroma processing. Output signals produced by VSP 1155 are suitable for coupling to a display device, e.g., a kinescope or LCD device (not

shown in FIG. 1), for producing a displayed image. VSP 1155 also includes a fast switch for coupling signals produced by OSD processor 1117 to the output video signal path at times when graphics and/or text is to be included in the displayed image. The fast switch is
5 controlled by control signal FSW which is generated by OSD processor 1117 in main microprocessor 1110 at times when text and/or graphics are to be displayed.

The input signal for VSP 1155 is signal PIPV that is output by picture-in-picture (PIP) processor 1140. When a user activates
10 PIP mode, signal PIPV represents a large picture (large pix) into which a small picture (small pix) is inset. When PIP mode is inactive, signal PIPV represents just the large pix, i.e., no small pix signal is included in signal PIPV. PIP processor 1140 provides the described functionality in a conventional manner using features included in unit
15 1140 such as a video switch, analog-to-digital converter (ADC), RAM, and digital to analog converter (DAC).

For an EPG display, the display data included in the EPG display is produced by OSD processor 1117 and included in the output signal by VSP 1155 in response to fast switch signal FSW. When
20 controller 1110 detects activation of the EPG display, e.g., when a user presses an appropriate key on remote control 1125, controller 1110 causes OSD processor 1117 to produce the EPG display using information such as program guide data from StarSight® module 1160. Controller 1110 causes VSP 1155 to combine the EPG display
25 data from OSD processor 1117 and the video image signal in response to signal FSW to produce a display including EPG. The EPG can occupy all or only a portion of the display area.

When the EPG display is active, controller 1110 executes a control program stored in EEPROM 1127. The control program monitors the location of a position indicator, such as a cursor and/or highlighting, in the EPG display. A user controls the location of the position indicator using direction and selection keys of remote control 1125. Alternatively, the system could include a mouse device. Controller 1110 detects activation of a selection device, such as clicking a mouse button, and evaluates current cursor location information in conjunction with EPG data being displayed to determine the function desired, e.g., tuning a particular program. Controller 1110 subsequently activates the control action associated with the selected feature.

The processing and displaying of a program guide in accordance with the present invention may be implemented using a combination of software and hardware. For example, referring to Figure 1, display of an EPG may be implemented by software in memory such as EEPROM 1127. Activation of an EPG, e.g., by a user pressing an EPG related button on remote control 1125, causes CPU 1112 to execute the EPG software routine. As part of generating an EPG display, CPU 1112 also accesses EPG data and graphics that may be stored in StarSight module 1160 via the I2C bus. Under control of the EPG software routine stored in EEPROM 1127, CPU 1112 enables OSD processor 1117 which formats the EPG data into a form suitable for producing an OSD representing the EPG data and graphics. The OSD data produced by OSD processor 1117 is coupled to video signal processor (VSP) 1155 via signal lines OSD_RGB. A fast switch in VSP 1155 couples the EPG OSD data to the output of VSP 1155 under control of signal FSW. That is, the software routine being executed by

CPU 1112 determines when the EPG data is to be displayed (e.g., what portion of the display) and sets signal FSW to the appropriate state for causing the fast switch to couple the EPG data to the output.

An exemplary embodiment of the features of the system shown in FIG. 1 that have been described thus far comprises an ST9296 microprocessor produced by SGS-Thomson Microelectronics for providing the features associated with mP 1110; an M65616 picture-in-picture processor produced by Mitsubishi for providing the described basic PIP functionality associated with PIP processor 1140; and an LA7612 video signal processor produced by Sanyo for providing the functions of VSP 1155.

Fig. 2 shows another example of an electronic device capable of processing and sorting program guide information in accordance with the present invention. As described below, the system shown in Figure 2 is an MPEG compatible system for receiving MPEG encoded transport streams representing broadcast programs. However, the system shown in Figure 2 is exemplary only. User interface systems are also applicable to other types of digital signal processing devices including non-MPEG compatible systems, involving other types of encoded datastreams. For example, other devices include digital video disc (DVD) systems and MPEG program streams, and systems combining computer and television functions such as the so-called "PCTV". Further, although the system described below is described as processing broadcast programs, this is exemplary only. The term 'program' is used to represent any form of packetized data such as telephone messages, computer programs, internet data or other communications, for example.

In overview, in the video receiver system of Figure 2, a carrier modulated with video data is received by antenna 10 and processed by unit 15. The resultant digital output signal is demodulated by demodulator 20 and decoded by decoder 30. The
5 output from decoder 30 is processed by transport system 25 which is responsive to commands from remote control unit 125. System 25 provides compressed data outputs for storage, further decoding, or communication to other devices.

Video and audio decoders 85 and 80 respectively, decode
10 the compressed data from system 25 to provide outputs for display. Data port 75 provides an interface for communication of the compressed data from system 25 to other devices such as a computer or High Definition Television (HDTV) receiver, for example. Storage device 90 stores the compressed data from system 25 on storage
15 medium 105. Device 90, in a playback mode also supports retrieval of the compressed data from storage medium 105 for processing by system 25 for decoding, communication to other devices or storage on a different storage medium (not shown to simplify drawing).

Considering Figure 2 in detail, a carrier modulated with
20 video data received by antenna 10, is converted to digital form and processed by input processor 15. Processor 15 includes radio frequency (RF) tuner and intermediate frequency (IF) mixer and amplification stages for down-converting the input video signal to a lower frequency band suitable for further processing. The resultant
25 digital output signal is demodulated by demodulator 20 and decoded by decoder 30. The output from decoder 30 is further processed by transport system 25.

Multiplexer (mux) 37 of service detector 33 is provided, via selector 35, with either the output from decoder 30, or the decoder 30 output further processed by a descrambling unit 40. Descrambling unit 40 may be, for example, a removable unit such as a smart card in accordance with ISO 7816 and NRSS (National Renewable Security Standards) Committee standards (the NRSS removable conditional access system is defined in EIA Draft Document IS-679, Project PN-3639). Selector 35 detects the presence of an insertable, compatible, descrambling card and provides the output of unit 40 to mux 37 only if the card is currently inserted in the video receiver unit. Otherwise selector 35 provides the output from decoder 30 to mux 37. The presence of the insertable card permits unit 40 to descramble additional premium program channels, for example, and provide additional program services to a viewer. It should be noted that in the preferred embodiment NRSS unit 40 and smart card unit 130 (smart card unit 130 is discussed later) share the same system 25 interface such that only either an NRSS card or a smart card may be inserted at any one time. However, the interfaces may also be separate to allow parallel operation.

The data provided to mux 37 from selector 35 is in the form of an MPEG compliant packetized transport datastream as defined in MPEG systems standard section 2.4 and includes program guide information and the data content of one or more program channels. The individual packets that comprise particular program channels are identified by Packet Identifiers (PIDs). The transport stream contains Program Specific Information (PSI) for use in identifying the PIDs and assembling individual data packets to recover the content of all the program channels that comprise the

packetized datastream. Transport system 25, under the control of the system controller 115, acquires and collates program guide information from the input transport stream, storage device 90 or an internet service provider via the communication interface unit 116.

- 5 The individual packets that comprise either particular program channel content or Program Guide information, are identified by their Packet Identifiers (PIDs) contained within header information. As discussed above, the program description may comprise different program descriptive fields such as title, star, rating, etc., relating to a
- 10 program.

- The user interface incorporated in the video receiver shown in Figure 2 enables a user to activate various features by selecting a desired feature from an on-screen display (OSD) menu. The OSD menu may include an electronic program guide (EPG) as
- 15 described above and other features discussed below. Data representing information displayed in the OSD menu is generated by system controller 115 in response to stored program guide information, stored graphics information, and/or program guide and graphics information received via the input signal (e.g., StarSight
- 20 data) as described above and in accordance with exemplary control programs to be shown in Figs. 5 and 6 and to be discussed below. The software control programs may be stored, for example, in embedded memory (not shown) of system controller 115.

- Using remote control unit 125 (or other selection means
- 25 such as a mouse) a user can select from the OSD menu items such as a program to be viewed, a program to be stored, the type of storage media and manner of storage. System controller 115 uses the selection information, provided via interface 120, to configure system

25 to select the programs for storage and display and to generate PSI
suitable for the selected storage device and media. Controller 115
configures system 25 elements 45, 47, 50, 55, 65 and 95 by setting
control register values within these elements via a data bus and by
5 selecting signal paths via muxes 37 and 110 with control signal C.

In response to control signal C, mux 37 selects either, the
transport stream from unit 35, or in a playback mode, a datastream
retrieved from storage device 90 via store interface 95. In normal,
non-playback operation, the data packets comprising the program
10 that the user selected to view are identified by their PIDs by selection
unit 45. If an encryption indicator in the header data of the selected
program packets indicates the packets are encrypted, unit 45
provides the packets to decryption unit 50. Otherwise unit 45
provides non-encrypted packets to transport decoder 55. Similarly,
15 the data packets comprising the programs that the user selected for
storage are identified by their PIDs by selection unit 47. Unit 47
provides encrypted packets to decryption unit 50 or non-encrypted
packets to mux 110 based on the packet header encryption indicator
information.

20 The functions of decryptors 40 and 50 may be
implemented in a single removable smart card which is compatible
with the NRSS standard. This approach places all security related
functions in one removable unit that can easily be replaced if a
service provider decides to change encryption technique or to permit
25 easily changing the security system, e.g., to descramble a different
service.

Units 45 and 47 employ PID detection filters that match
the PIDs of incoming packets provided by mux 37 with PID values

pre-loaded in control registers within units 45 and 47 by controller 115. The pre-loaded PIDs are used in units 47 and 45 to identify the data packets that are to be stored and the data packets that are to be decoded for use in providing a video image. The pre-loaded PIDs are stored in look-up tables in units 45 and 47. The PID look-up tables are memory mapped to encryption key tables in units 45 and 47 that associate encryption keys with each pre-loaded PID. The memory mapped PID and encryption key look-up tables permit units 45 and 47 to match encrypted packets containing a pre-loaded PID with associated encryption keys that permit their decryption. Non-encrypted packets do not have associated encryption keys. Units 45 and 47 provide both identified packets and their associated encryption keys to decryptor 50. The PID look-up table in unit 45 is also memory mapped to a destination table that matches packets containing pre-loaded PIDs with corresponding destination buffer locations in packet buffer 60. The encryption keys and destination buffer location addresses associated with the programs selected by a user for viewing or storage are pre-loaded into units 45 and 47 along with the assigned PIDs by controller 115. The encryption keys are generated by ISO 7816-3 compliant smart card system 130 from encryption codes extracted from the input datastream. The generation of the encryption keys is subject to customer entitlement determined from coded information in the input datastream and/or pre-stored on the insertable smart card itself (International Standards Organization document ISO 7816-3 of 1989 defines the interface and signal structures for a smart card system).

The packets provided by units 45 and 47 to unit 50 are encrypted using an encryption techniques such as the Data Encryption

Standard (DES) defined in Federal Information Standards (FIPS) Publications 46, 74 and 81 provided by the National Technical Information Service, Department of Commerce. Unit 50 decrypts the encrypted packets using corresponding encryption keys provided by
5 units 45 and 47 by applying decryption techniques appropriate for the selected encryption algorithm. The decrypted packets from unit 50 and the non-encrypted packets from unit 45 that comprise the program for display are provided to decoder 55. The decrypted packets from unit 50 and the non-encrypted packets from unit 47
10 that comprise the program for storage are provided to mux 110.

Unit 60 contains four packet buffers accessible by controller 115. One of the buffers is assigned to hold data destined for use by controller 115 and the other three buffers are assigned to hold packets that are destined for use by application devices 75, 80
15 and 85. Access to the packets stored in the four buffers within unit 60 by both controller 115 and by application interface 70 is controlled by buffer control unit 65. Unit 45 provides a destination flag to unit 65 for each packet identified by unit 45 for decoding. The flags indicate the individual unit 60 destination locations for the
20 identified packets and are stored by control unit 65 in an internal memory table. Control unit 65 determines a series of read and write pointers associated with packets stored in buffer 60 based on the First-In-First-Out (FIFO) principle. The write pointers in conjunction with the destination flags permit sequential storage of an identified
25 packet from units 45 or 50 in the next empty location within the appropriate destination buffer in unit 60. The read pointers permit sequential reading of packets from the appropriate unit 60 destination buffers by controller 115 and application interface 70.

The non-encrypted and decrypted packets provided by units 45 and 50 to decoder 55 contain a transport header as defined by section 2.4.3.2 of the MPEG systems standard. Decoder 55 determines from the transport header whether the non-encrypted
5 and decrypted packets contain an adaptation field (per the MPEG systems standard). The adaptation field contains timing information including, for example, Program Clock References (PCRs) that permit synchronization and decoding of content packets. Upon detection of a timing information packet, that is a packet containing an adaptation
10 field, decoder 55 signals controller 115, via an interrupt mechanism by setting a system interrupt, that the packet has been received. In addition, decoder 55 changes the timing packet destination flag in unit 65 and provides the packet to unit 60. By changing the unit 65 destination flag, unit 65 diverts the timing information packet
15 provided by decoder 55 to the unit 60 buffer location assigned to hold data for use by controller 115, instead of an application buffer location.

Upon receiving the system interrupt set by decoder 55, controller 115 reads the timing information and PCR value and stores
20 it in internal memory. PCR values of successive timing information packets are used by controller 115 to adjust the system 25 master clock (27 MHz). The difference between PCR based and master clock based estimates of the time interval between the receipt of successive timing packets, generated by controller 115, is used to adjust the
25 system 25 master clock. Controller 115 achieves this by applying the derived time estimate difference to adjust the input control voltage of a voltage controlled oscillator used to generate the master clock.

Controller 115 resets the system interrupt after storing the timing information in internal memory.

Packets received by decoder 55 from units 45 and 50 that contain program content including audio, video, caption, and other information, are directed by unit 65 from decoder 55 to the designated application device buffers in packet buffer 60. Application control unit 70 sequentially retrieves the audio, video, caption and other data from the designated buffers in buffer 60 and provides the data to corresponding application devices 75, 80 and 85. The application devices comprise audio and video decoders 80 and 85 and high speed data port 75. For example, packet data corresponding to a composite program guide generated by the controller 115 as described above, may be transported to the video decoder 85 for formatting into video signal suitable for display on a monitor (not shown) connected to the video decoder 85. Also, for example, data port 75 may be used to provide high speed data such as computer programs, for example, to a computer. Alternatively, port 75 may be used to output data to an HDTV decoder to display images corresponding to a selected program or a program guide, for example.

Packets that contain PSI information are recognized by unit 45 as destined for the controller 115 buffer in unit 60. The PSI packets are directed to this buffer by unit 65 via units 45, 50 and 55 in a similar manner to that described for packets containing program content. Controller 115 reads the PSI from unit 60 and stores it in internal memory.

Controller 115 also generates condensed PSI (CPSI) from the stored PSI and incorporates the CPSI in a packetized datastream suitable for storage on a selectable storage medium. The packet

identification and direction is governed by controller 115 in conjunction with the unit 45 and unit 47 PID, destination and encryption key look-up tables and control unit 65 functions in the manner previously described.

5 In addition, controller 115 is coupled to a communication interface unit 116 that operates in a manner similar to interface unit 1113 in Figure 1. That is, unit 116 provides the capability to upload and download information to and from the internet. Communication interface unit 116 includes, for example, a modem for connecting to
10 an internet service provider, e.g., via a telephone line or via a cable television line. The communication capability allows the system shown in Figure 2 to provide email capability and internet related features such as web browsing in addition to receiving television programming.

15 Fig. 3 is a specific implementation of an electronic device generally shown in Fig. 2 and described in detail above. Fig. 3 represents a satellite receiver set-top box, designed and manufactured by Thomson Consumer Electronics, of Indianapolis, Indiana, USA, for receiving DirecTV™ satellite service provided by
20 Hughes Electronics.

As shown in Fig. 3, the set-top box has a tuner 301 which receives and tunes applicable satellite RF signals in the range of 950-1450 Mhz from a satellite antenna 317. The tuned analog signals are outputted to a link module 302 for further processing. Link module
25 302 is responsible for further processing of the analog tuned signals I_{out} and Q_{out} from tuner 301, including filtering and conditioning of the analog signals, and conversion of the analog signals into a digital output signal, DATA. The link module 302 is implemented as

an integrated circuit (IC). The link module IC is manufactured by SGS-Thomson Microelectronics of Grenoble, France, and has Part No. ST 15339-610.

5 The digital output, DATA, from the link module 302 consists of compliant packetized data stream recognized and processable by the transport unit 303. The datastream, as discussed in detail in relation to Fig. 2, includes program guide data information and the data content of one or more program channels of the satellite broadcast service from Direct TV.

10 The function of the transport unit 303 is the same as the transport system 25 shown in Fig. 2 and discussed already. As described above, the transport unit 303, processes the packetized datastream according to the Packet Identifiers (PID) contained in the header information. The processed datastream are then formatted
15 into MPEG compatible, compressed audio and video packets and coupled to a MPEG decoder 304 for further processing.

The transport unit 303 is controlled by an Advanced RISC Microprocessor (ARM) 315 which is a RISC based microprocessor. The ARM processor 315 executes control software residing in ROM 308,
20 one component of the software may be, for example, a control program shown in Fig. 5 or Fig. 6 for processing the applicable program guide information in accordance with aspects of the present invention as will be discussed below.

The transport unit 303 may be implemented as an
25 integrated circuit. For example, a preferred embodiment of a transport unit may be an IC manufactured by SGS-Thomson Microelectronics having a Part No. ST 15273-810 or 15103-65C.

The MPEG compatible, compressed audio and video packets from the transport unit 303 are delivered to a MPEG decoder 304. The MPEG decoder decodes the compressed MPEG datastream from the transport unit 303. The decoder 304 then outputs the applicable audio stream which can be further processed by the audio digital-to-analog converter (DAC) 305 to convert the digital audio data into analog sound. The decoder 304 also outputs applicable digital video data which represents image pixel information to a NTSC encoder 306. The NTSC encoder 306 then further processes this video data into NTSC compatible analog video signal so that video images may be displayed on a regular NTSC television screen. The MPEG decoder as described above may also implemented as an integrated circuit. A preferred embodiment of a MPEG decoder is an IC manufactured by SGS-Thomson Microelectronics having Part No. ST i3520.

Additional relevant functional blocks of Fig. 3 includes modem 307 which corresponds to the communication interface unit 116 shown in Fig. 2 for access to the internet, for example. Conditional Access Module (CAM) 309, corresponds to the NRSS decryption unit 130 shown in Fig. 2 for providing conditional access information. Wideband data module 310 corresponds to High Speed Data Port 75 shown in Fig. 2 for providing high speed data access to, for example, a HDTV decoder or a computer. A keyboard/IR Receiver module 312 corresponds to Remote Unit interface 120 shown in Fig. 2 for receiving user control commands from a user control unit 314. Digital AV bus module 313 corresponds to I/O port 100 shown in Fig. 2 for connection to an external device such as a VCR or a DVD player.

Figs. 5 and 6 show the respective flow chart of two exemplary control programs which may be executed by either the CPU 1112 of Fig. 1, Controller 115 of Fig. 2 or ARM microprocessor 315 of Fig. 3 to implement the features according to aspects of the present invention. A person skilled in the art would readily recognize that the control programs when executed by any one of the systems described in Figs. 1-3 will provide the same features in accordance with the present invention. Therefore, to avoid redundancy, the control programs will be described below only with respect to the exemplary hardware implementation shown in Fig. 3.

When a user turns on the system shown in Fig. 3, the system will typically first display a video image of a program previously selected by the user for viewing. The user then may press, for example, a "GUIDE" button (not shown) on a user control unit 314 to display an electronic program guide.

In our exemplary embodiment, upon detecting this user request, the ARM microprocessor 315 in the transport unit 303 processes the program guide data information obtained from a data stream provided by a program guide information provider and formats the guide data information into OSD pixel data corresponding to a full "grid guide" as shown in Fig. 4. The OSD pixel data from the transport unit 303 is forwarded to the MPEG audio/video decoder 304 for generating the guide image, as described before.

The "grid guide" 400 typically occupies the whole screen of a display. The grid guide shows a program schedule in a time-and-channel format, similar to a TV schedule listed in a newspaper. In particular, one dimension (e.g., horizontal) of the guide shows the time information while the other dimension (e.g., vertical) of the guide

shows the channel information. The time information is conveyed to the user by having a time line 401 on the top portion of the guide and is demarked by half hour intervals. The channel information is conveyed to the user by channel numbers 410 - 416 and
5 corresponding channel station names 420 - 426.

In addition, the program guide 400 contains icons Internet 450 and Email 460. By clicking on these icons, a user can surf the internet and send/receive email respectively through the communication interface unit 307. In addition, an internet web site
10 icon may also be incorporated into a grid of a program guide. For example, by clicking on "ESPN.com" within grid 470, the user will automatically be linked to, for example, an ESPN web site.

As shown at step 505 of Fig. 5, a user may request the alphabetical sort feature according to the present invention by
15 selecting the icon 480 shown in Fig. 4 using the user control unit 314. At step 510, upon detecting this user request, the ARM processor 315 will create an alpha-sort user interface screen 700 as shown in Fig. 7.

The ARM processor 315 will also call a library routine as shown at step 515. This library routine 515 will allocate part of the
20 memory 316 as "sort memory" for sorting the program guide data information already downloaded from the guide data provider and previously stored in the memory 316.

In addition, after allocating the sort memory, the ARM processor 315 will first presort all of the programs contained in the program guide data information based on the respective program title
25 for each program, as shown at step 520. To eliminate the effect of essentially meaningless sentence articles such as "a", "an", "the", etc., on the sorting of the programs, the ARM processor 315 will first

reformat the program titles so that all the sentence articles are moved to the end of the titles. The processor 315 will then hash-sort all the reformatted program titles in the current program guide information using the first 4 characters of the reformatted titles. Hash sorting will
5 put all the programs with the same 4 characters in their respective title in the same "bucket", and these buckets are linked together in an alphabetized list, keyed by program title.

The alpha sort interface screen 700 in Fig. 7 contains a "virtual" keyboard 705 having a listing of alpha and numeric
10 characters. A user-entered text string field 710 is displayed on the top of the screen 700. The user may use the navigation buttons (not shown) on the user control unit 314 to select an alpha or numeric character on the virtual key board 705. When the user selects a character on the keyboard, that character appears in the first position
15 of the text string field 710.

Once a character is entered by the user and appears in the text string field 710, the ARM processor 315 will attempt to find, from the presorted list described, a first program with the first character of its program title matching the first entered character, as
20 shown at step 525.

An advantageous aspect of the present invention is that by having already presorted the programs in hashed bins, the ARM processor 315 can quickly get close to the first matched program by simply locating the correct bin. Once the correct bin is found, the
25 ARM processor 315 can then sort the correct bin to obtain the specific program with the first character of the title matching the first entered character, as shown in step 540.

If on the other hand, no program can be found having a title matching the entered text, then the ARM processor 315 will select the program in the position immediately following where the matched program would have been located on the alpha-sorted list, as shown at step 525.

At steps 530, 535, and 545, a loop is set up so that the ARM processor 315 can identify the next several programs having program titles which alphabetically follow the first selected program, until the screen is full or that the end of the list is reached. The result is a display of a list of programs in alphabetized order by their program titles.

As an example, as shown in Fig. 7, when the letter "a" is first selected by a user, the display shows alphabetically the programs with titles which begin with the letter "a", as illustrated by the listing of programs 720-724.

Upon displaying this alphabetical list, the ARM processor 315 will wait to see if the user will enter any additional characters as shown at step 550.

If a second letter is entered, this second letter will be displayed in the second position in the text string field 710. Once this letter is selected, the ARM processor 315 will cause the screen to display alphabetically the programs which begin with the first two letters selected by the user. For example, as shown in Fig. 8, the screen will now display an alphabetically ordered list having programs 820-824, with programs having the characters "au" in their respective title at the top of list.

Another exemplary control program of the present invention is shown in Fig. 6. The only difference between the flow

chart shown in Fig. 6 and Fig. 5 is the inclusion in Fig. 6 of the capability to allow a user to specify which program descriptive field to sort by when a text string is entered by the user as shown at step 612.

5 As described above, program guide information may include different program descriptive fields. A descriptive field, for example, may relate to program title, stars, director, parental rating, or a short summary of the content of a program, etc. The present inventors recognize that it is advantageous to be able to let a user
10 select which descriptive field is to be used to sort the program guide information.

 As shown in Fig. 9, a user interface screen implementing the features provided by the control program of Fig. 6 is displayed. The top portion of the interface screen shows examples of some
15 possible program descriptive fields 901 - 905 that may be part of a program description contained in program guide information. The user can select one of the fields 901-905 by using navigation keys on the user control 314 of Fig. 3.

 As shown in Fig. 9, for example, the field "star" has been
20 selected and thus highlighted. The ARM processor 315 will then use this field as the key to sort the programs in the program guide information. If the user then enters a character "h", for example as shown in Fig. 9, an alphabetical list of programs, alphabetized according to the name of the star for the programs, will appear. In
25 this case, programs which star Harrison Ford are listed first, followed by programs starring Tom Hanks, in alphabetical order, according to the "star" field chosen. This capability of allowing a user to select

It is to be understood that the embodiments and variations shown and described herein are for illustrations only and that various modifications may be implemented by those skilled in the art without departing from the scope and spirit of the invention.

It is to be understood that the embodiments and variations shown and described herein are for illustrations only and that various modifications may be implemented by those skilled in the art without departing from the scope and spirit of the invention.

CLAIMS

5 1. An apparatus in which channel guide information containing a respective program description for programs is processed to form a channel guide, comprising:

Control means for displaying concurrently a list of program descriptive fields and an entry for entering a text string;

10 user control means for allowing a user to select a program descriptive field from the list of program descriptive fields and to enter a text string having one or more user-selectable characters in the entry;

the control means for performing an alphabetical sort of the programs based on the entered text string and the selected program descriptive field, and
15 for locating a first program with the respective program description in the selected program description field matching the entered text string.

20 2. The apparatus of claim 1 wherein the control means further causing the alphabetically sorted programs to be displayed starting with the first program.

3. The apparatus of claim 1 wherein the program descriptive field may relate to title, star, director, or context of the programs.

25 4. The apparatus of claim 1 wherein the control means performs the alphabetical sort of the programs by first moving any sentence articles of the respective program description to the end of the respective program description.

30 5. The apparatus of claim 1 wherein if the control means fails to locate the first program having a program description matching the entered text string, the next program on the alphabetical sorted list immediately following the position where said first program would have been located is selected instead.

6. A method for processing channel information containing a respective program description for programs, comprising the steps of:

- displaying concurrently a list of program descriptive fields and an entry
- 5 for entering a text string;
- selecting a program descriptive field from the list of program descriptive fields and entering a text string having one or more user-selectable characters in the entry;
- performing an alphabetical sort of the programs based on the entered text
- 10 string and the selected program descriptive field; and
- locating a first program with the respective program description in the selected program description field matching the entered text string.

7. The method of claim 6 further comprises the step of displaying the

15 alphabetical sorted list of programs starting with the first program.

8. The method of claim 6 wherein the program descriptive field may relate to title, star, rating, director or content of the programs.

20 9. The method of claim 6 wherein the performing step further comprises the step of first moving any sentence articles of the respective program description to the end of the respective program description.

10. The method of claim 6, wherein if the locating step cannot locate the

25 first program matching the entered text string, the next program on the alphabetical sorted list immediately following the position where the first program would have been located is selected instead.

11. The method of claim 6, further comprising the step of if another

30 program descriptive field is selected from the list of the program descriptive fields, performing an alphabetical sort of the programs based on the entered text string and the another selected program descriptive field.

12. An apparatus in which channel guide information containing a
respective program description for programs is processed to form a channel
5 guide, comprising:

a controller for displaying concurrently a list of program descriptive fields
and an entry for entering a text string;

a user entry device for allowing a user to select a program descriptive
field from the list of program descriptive fields and to enter a text string having
10 one or more user-selectable characters in the entry;

the controller, in response to the user entry device, alphabetically sorts
the programs based on the entered text string and the selected program
descriptive field, and for locating a first program with the respective program
description in the selected program description field matching the entered text
15 string.

13. The apparatus of claim 12 wherein the controller further causing the
alphabetically sorted programs to be displayed starting with the first program,
concurrently, with the list of program descriptive fields.
20

ABSTRACT

An apparatus and a method for processing channel guide information containing program descriptions for programs, including the following. The channel guide information is stored in a memory. A user-entered request and a text string having one or more user-selectable characters may be entered by a user. The programs are then sorted in alphabetical order according to the program description to form an alpha-sorted list, in response to the user request. An alphabetical list of programs is then displayed with the first program on the list being a program having a program description matching the user-entered text string, if one can be located.

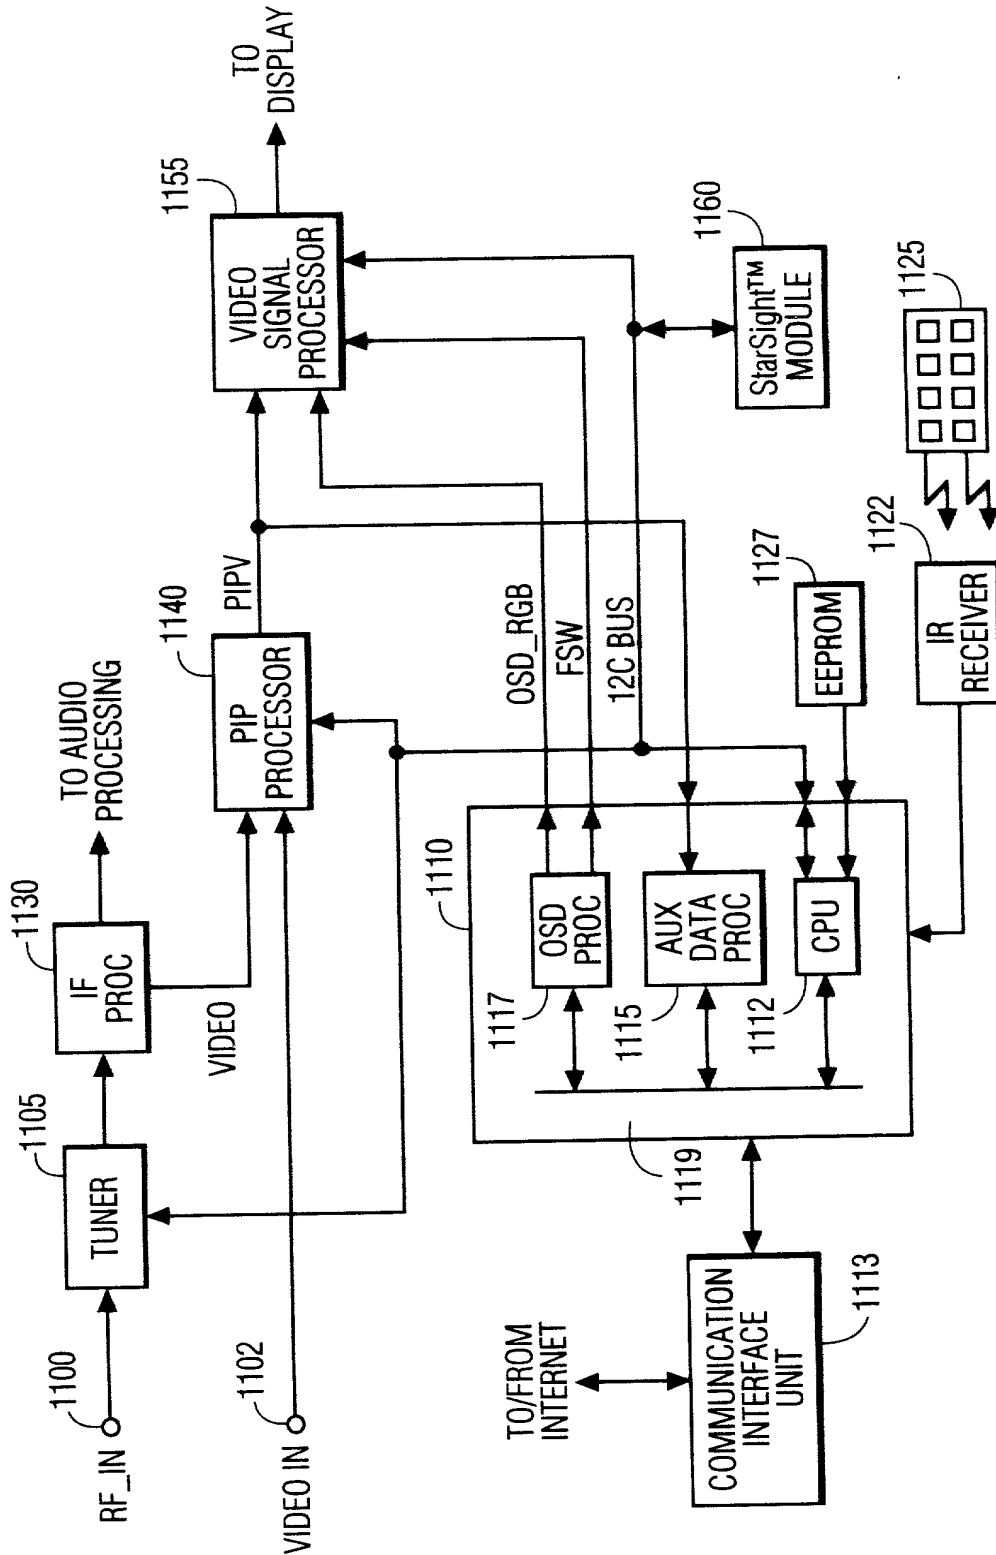


FIG. 1

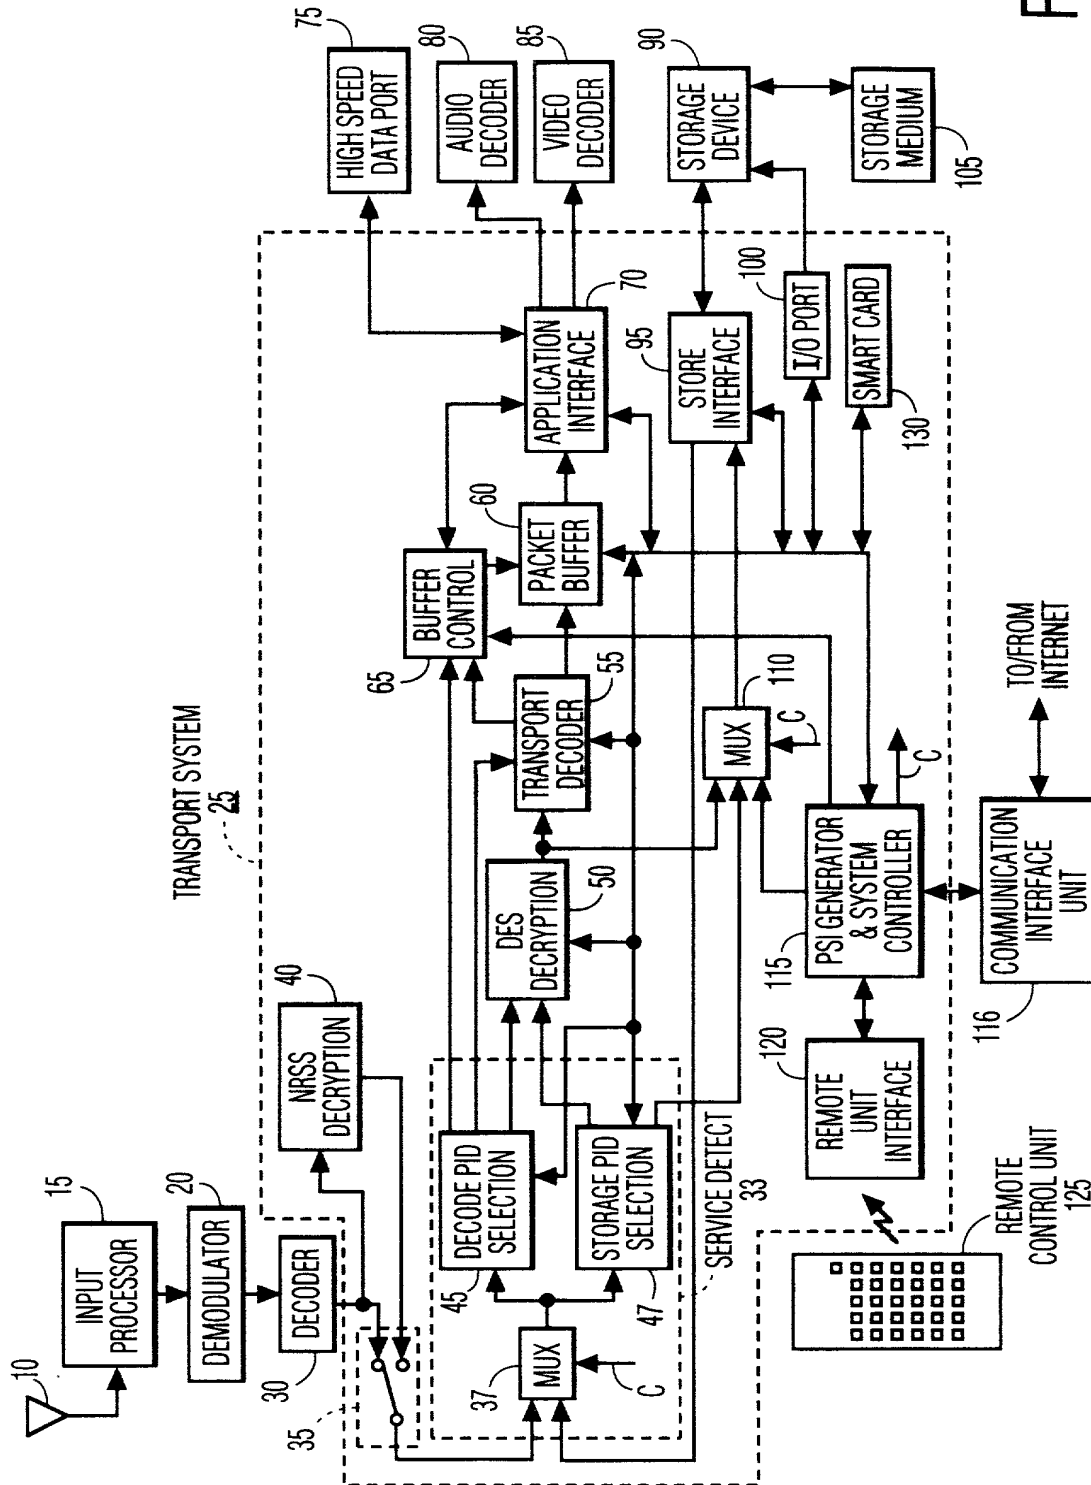


FIG. 2

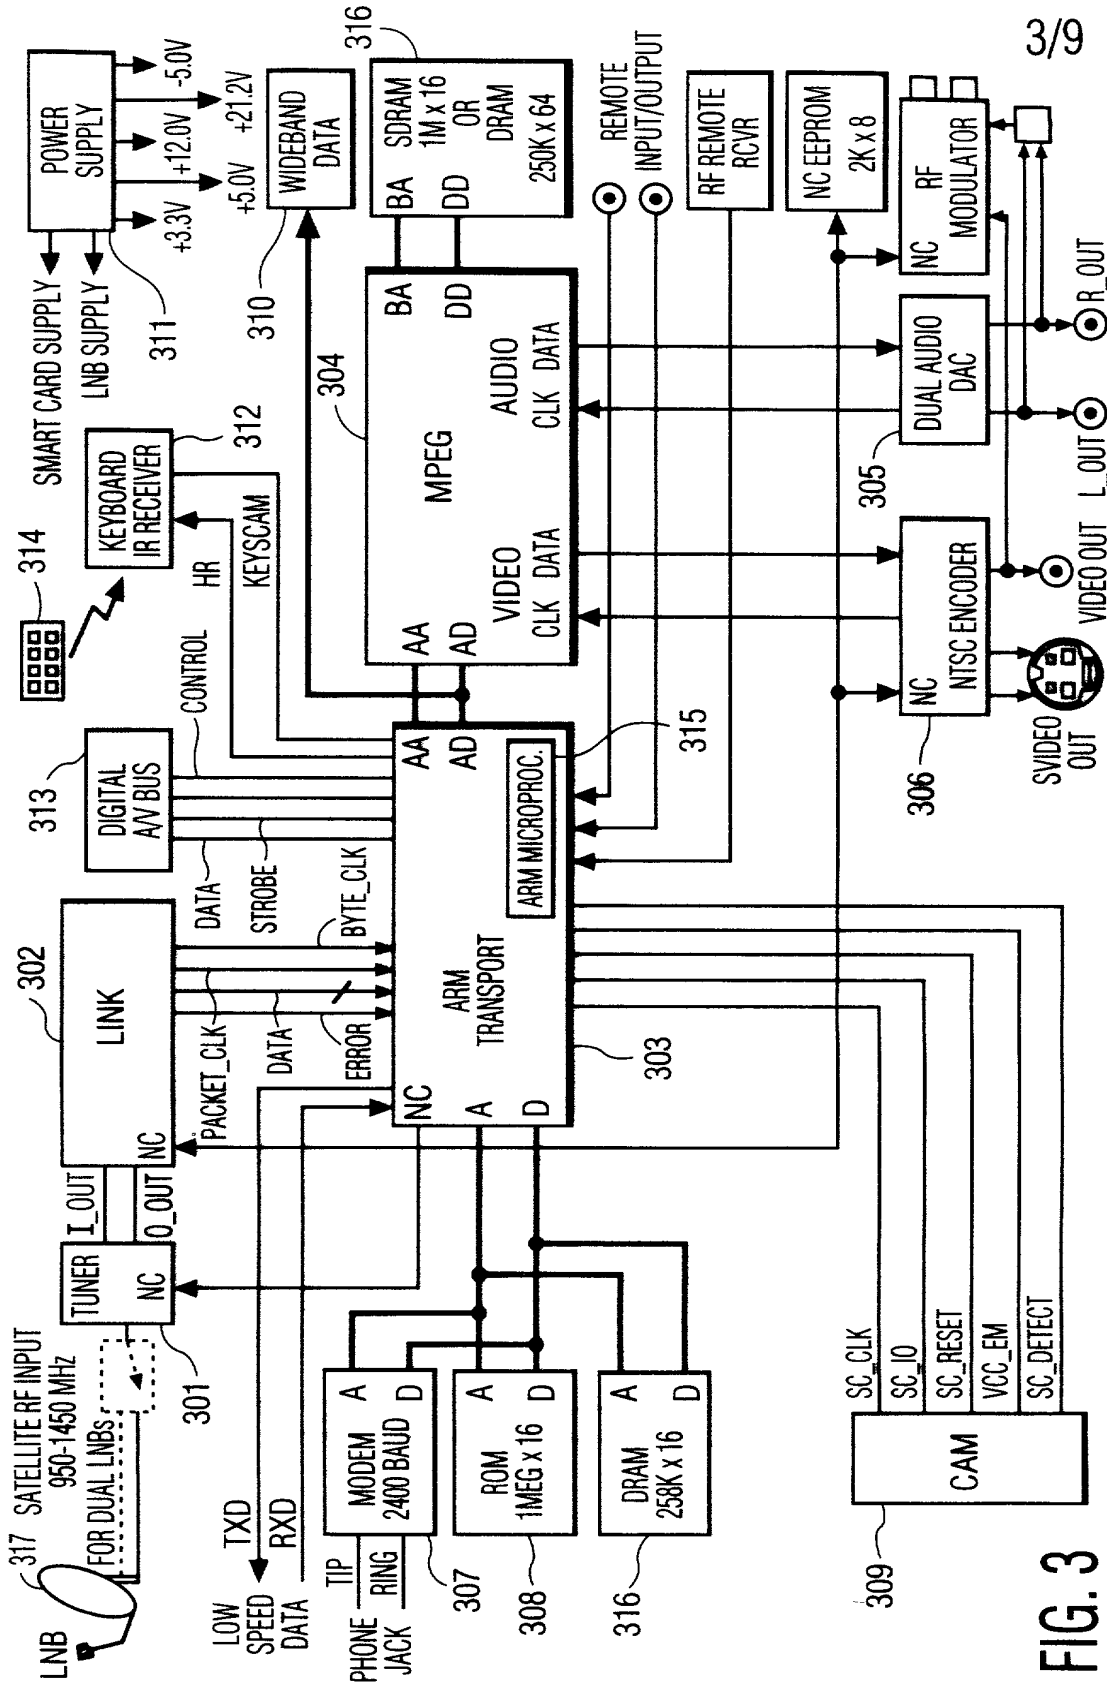


FIG. 3

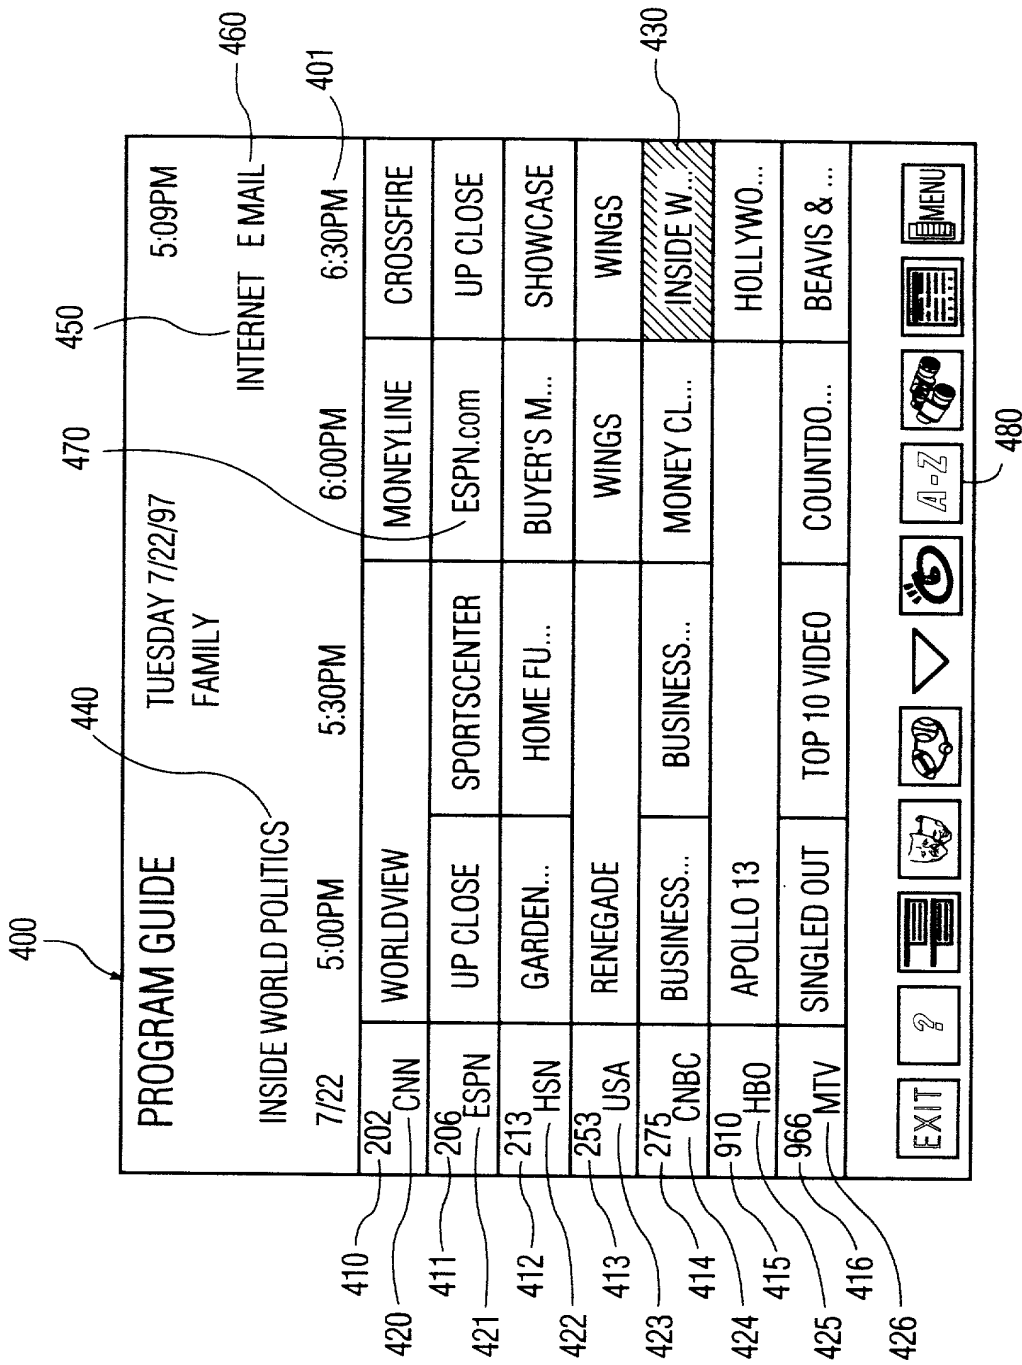


FIG. 4

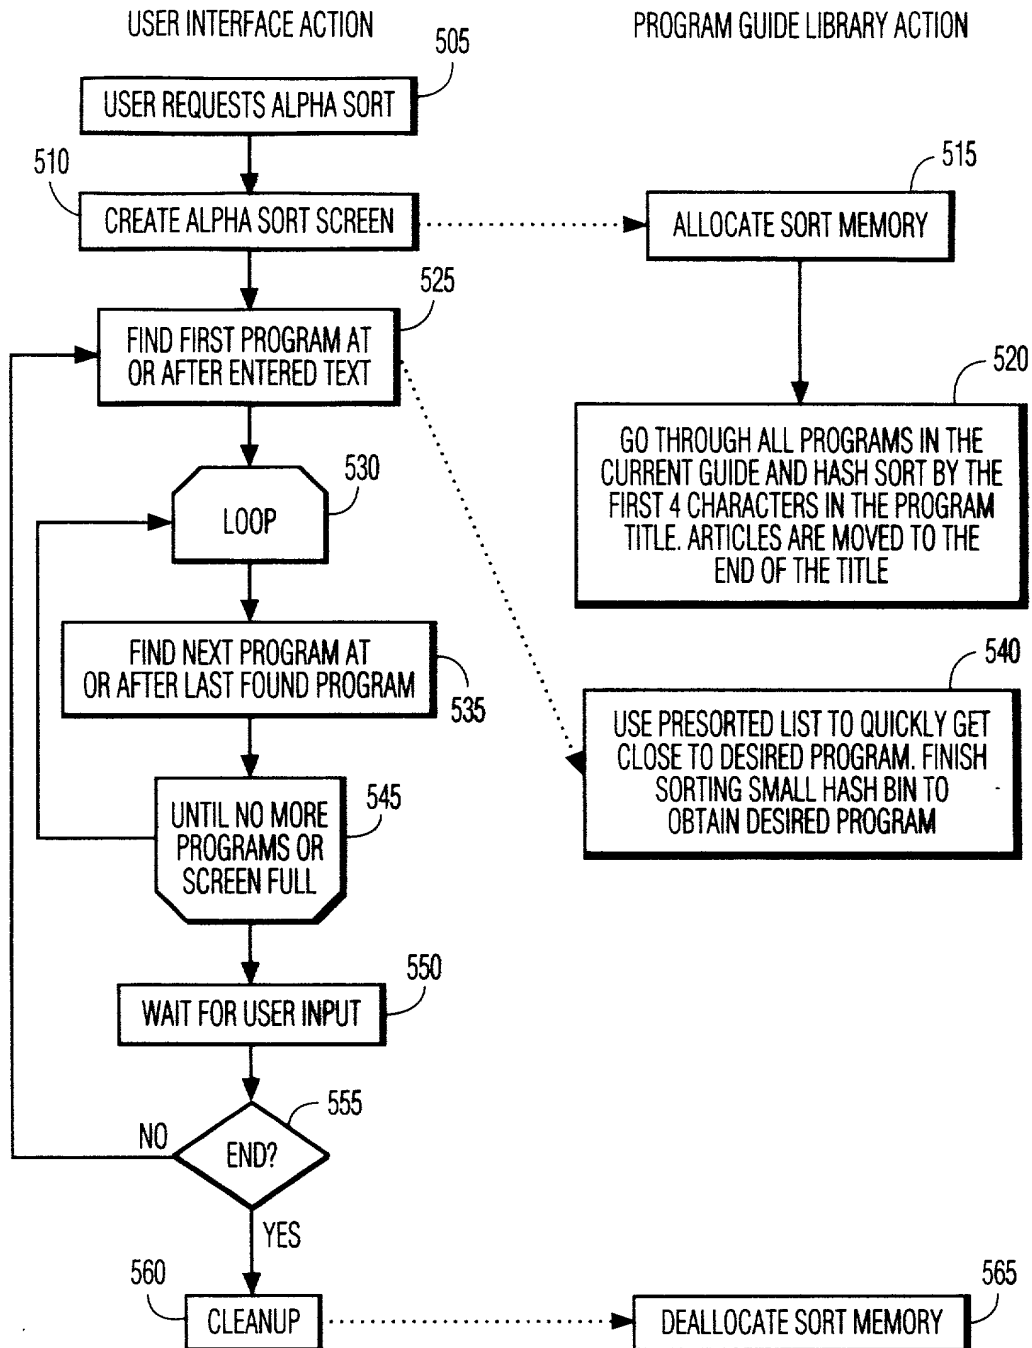


FIG. 5

6/9

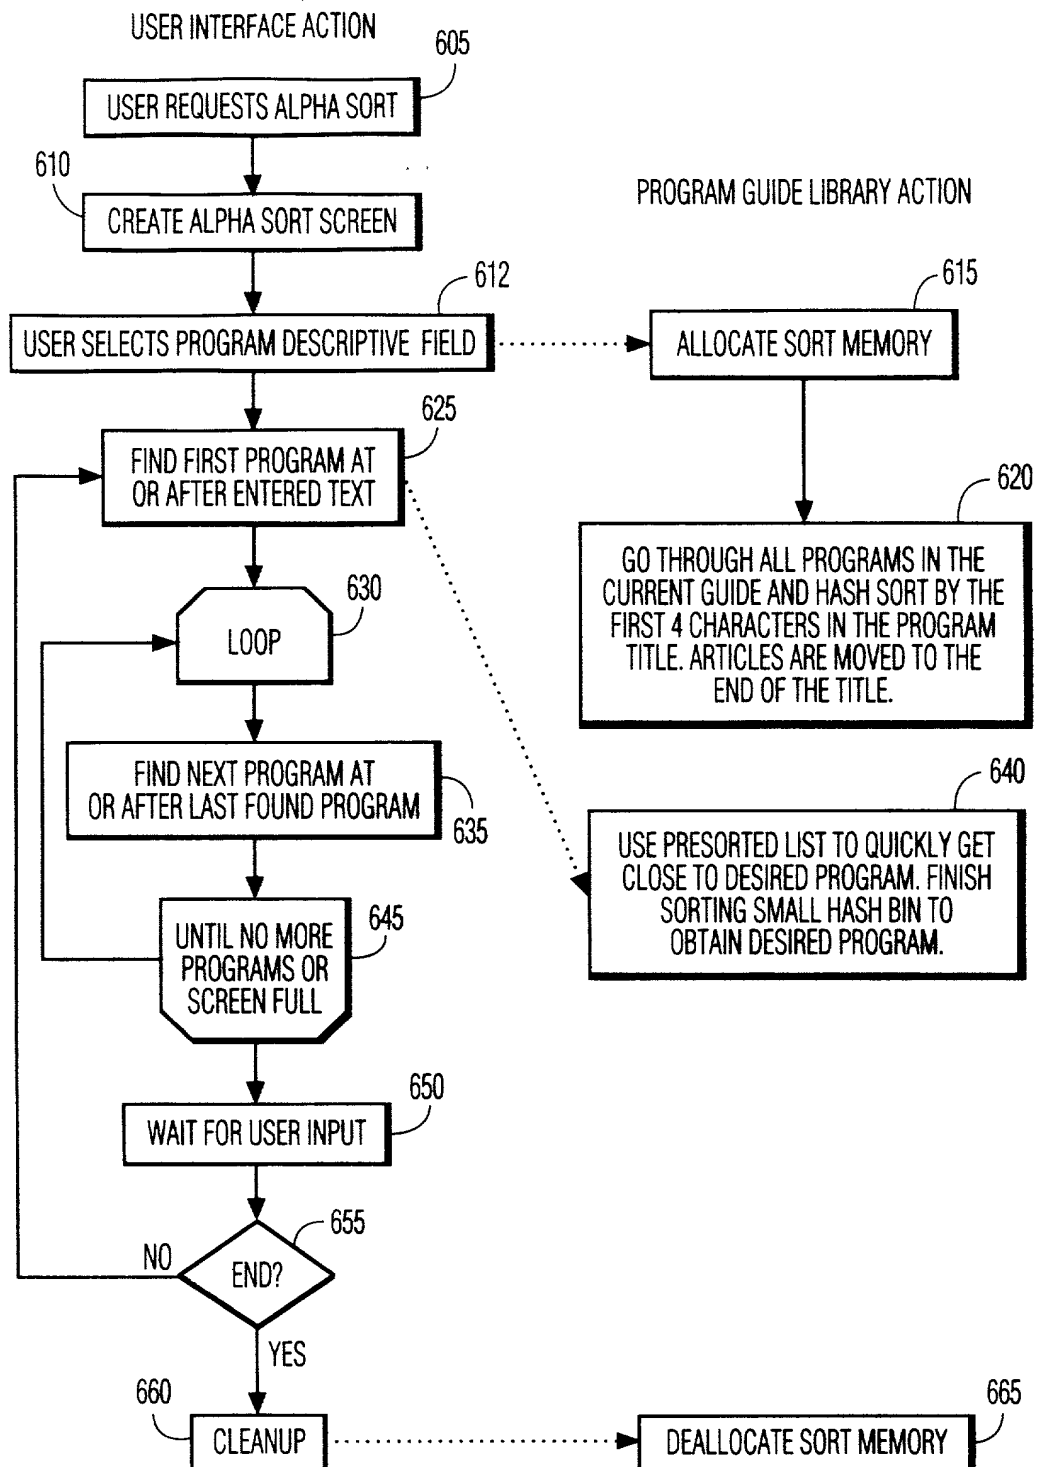


FIG. 6

09/445135

7/9

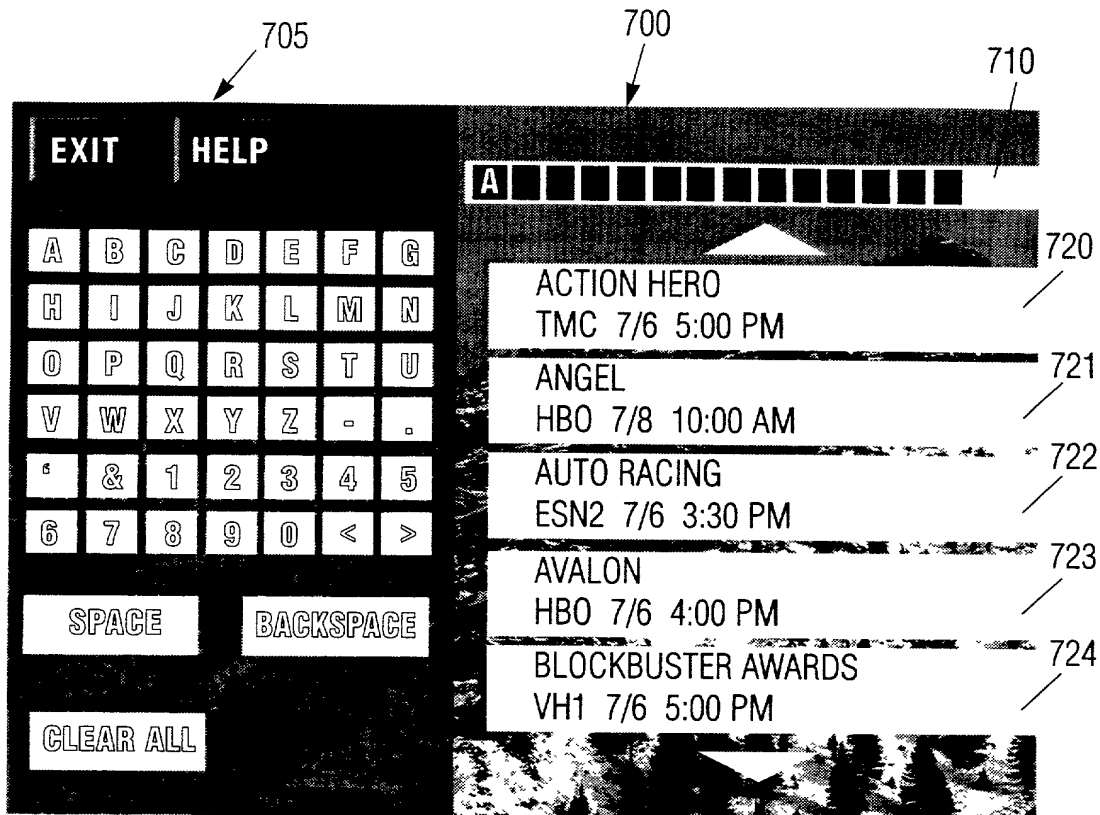


FIG. 7

09/445135

8/9

800

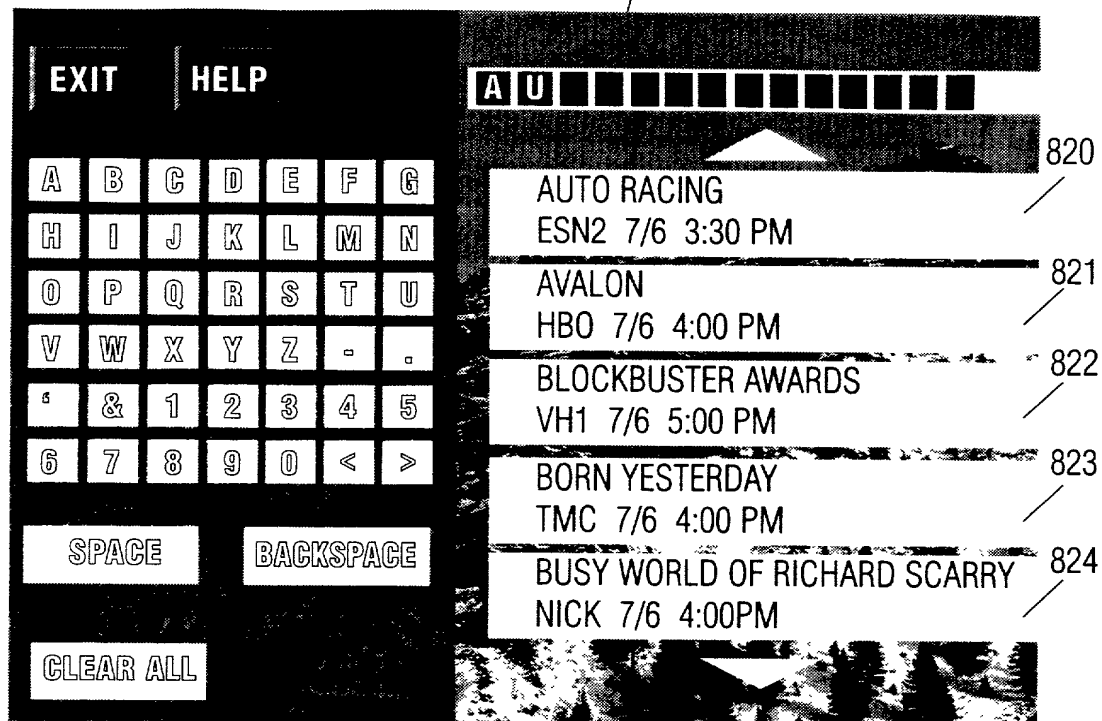


FIG. 8

09/445135

9/9

901902903904905900

TITLE		STAR	DIRECTOR	RATING	CONTENT						
EXIT		HELP		<div style="display: flex; align-items: center;"> H <div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; background-color: black;"></div> <div style="width: 15px; height: 15px; background-color: black;"></div> <div style="width: 15px; height: 15px; background-color: black;"></div> <div style="width: 15px; height: 15px; background-color: black;"></div> <div style="width: 15px; height: 15px; background-color: black;"></div> <div style="width: 15px; height: 15px; background-color: black;"></div> <div style="width: 15px; height: 15px; background-color: black;"></div> <div style="width: 15px; height: 15px; background-color: black;"></div> <div style="width: 15px; height: 15px; background-color: black;"></div> <div style="width: 15px; height: 15px; background-color: black;"></div> </div> </div>							
A	B	C	D	E	F	G	HARRISON		AIR FORCE ONE	HBO	920
H	I	J	K	L	M	N	FORD	7/6	3:00 PM		
O	P	Q	R	S	T	U	HARRISON		RAIDERS...	TNT	921
V	W	X	Y	Z	-	.	FORD	7/8	3:00 AM		
'	&	1	2	3	4	5	TOM		BIG	TMC	922
6	7	8	9	0	<	>	HANKS	7/9	2:00 PM		
SPACE		BACKSPACE					TOM		WOMAN IN RED	HBO	923
CLEAR ALL							HANKS	7/10	3:00 PM		

FIG. 9

Please type a plus sign (+) inside this box → +

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	RCA88682
	First Named Inventor	Darrel Wayne Randall
	COMPLETE IF KNOWN	
	Application Number	09/445,135
	Filing Date	December 3, 1999
	Group Art Unit	
Examiner Name		

☐ Declaration Submitted with Initial Filing
 OR
☒ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

As a below named inventor, I hereby declare

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SYSTEM AND METHOD FOR SORTING PROGRAM GUIDE INFORMATION

the specification of which (Title of the Invention)

☐ is attached hereto
OR
☒ was filed on (MM/DD/YYYY) December 3, 1999 as United States Application Number or PCT International

Application Number 09/445,135 and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	
60/048,879	06/06/97	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

(Page 1 of 2)

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO:**

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number



DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

U. S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
PCT/US98/11636	06/05/98	

☐ Additional U. S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number
TRIPOLI, Joseph S.	26,040		
SHEDD, Robert D.	36,269		
LIAO, Frank Y.	40,065		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto

Direct all correspondence to:

☐ Customer Number or Bar Code Label

OR ☒ Correspondence address below

Name	JOSEPH S. TRIPOLI - PATENT OPERATIONS				
Address	PO BOX 5312 - 2 INDEPENDENCE WAY				
Address					
City	PRINCETON	State	NJ	ZIP	08543
Country	USA	Telephone	609-734-9400	Fax	609-734-9700

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname					
Darrell Wayne		Randall					
Inventor's Signature	<i>Darrell Wayne Randall</i>		Date	3/2/00			
Residence: City	Danville	State	IN	Country	USA	Citizenship	USA
Post Office Address	7485 Cherry Hill Drive						
Post Office Address							
City	Danville	State	IN	ZIP	46254	Country	USA

☒ Additional inventors are being named on the 2 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto


Please type a plus sign (+) inside this box → +

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

+

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 1 of 2

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
<u>Daniel Richard</u>				<u>Schneidewend</u>			
Inventor's Signature				Date		<u>3/2/00</u>	
Residence: City		<u>Fishers</u>		State		<u>IN</u>	
				Country		<u>USA</u>	
Post Office Address		<u>11221 Tall Trees Drive</u>					
Post Office Address							
City		<u>Fishers</u>		State		<u>IN</u>	
				ZIP		<u>46038</u>	
				Country		<u>USA</u>	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
<u>Michael Joseph</u>				<u>McLane</u>			
Inventor's Signature				Date			
Residence: City		<u>Indianapolis</u>		State		<u>IN</u>	
				Country		<u>USA</u>	
Post Office Address		<u>720 Sherwood Drive</u>					
Post Office Address							
City		<u>Indianapolis</u>		State		<u>IN</u>	
				ZIP		<u>46240</u>	
				Country		<u>USA</u>	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
<u>Megan Louise</u>				<u>Brown</u>			
Inventor's Signature				Date			
Residence: City		<u>Carmel</u>		State		<u>IN</u>	
				Country		<u>USA</u>	
Post Office Address		<u>11321 Rolling Springs Drive</u>					
Post Office Address							
City		<u>Carmel</u>		State		<u>IN</u>	
				ZIP		<u>46033</u>	
				Country		<u>USA</u>	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → +

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

+

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 1 of 2

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Daniel Richard				Schneidewend			
Inventor's Signature				Date			
Residence: City	Fishers	State	IN	Country	USA	Citizenship	USA
Post Office Address		11221 Tall Trees Drive					
Post Office Address							
City	Fishers	State	IN	ZIP	46038	Country	USA
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
<u>Michael Joseph</u>				<u>McLane</u>			
Inventor's Signature		<i>Michael Joseph McLane</i>		Date		3/3/00	
Residence: City	<u>Indianapolis</u>	State	IN	Country	USA	Citizenship	USA
Post Office Address		720 Sherwood Drive					
Post Office Address							
City	Indianapolis	State	IN	ZIP	46240	Country	USA
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Megan Louise				Brown			
Inventor's Signature				Date			
Residence: City	Carmel	State	IN	Country	USA	Citizenship	USA
Post Office Address		11321 Rolling Springs Drive					
Post Office Address							
City	Carmel	State	IN	ZIP	46033	Country	USA

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

over

Please type a plus sign (+) inside this box → +

+

DECLARATION	ADDITIONAL INVENTOR(S) Supplemental Sheet Page <u>1</u> of <u>2</u>
--------------------	---

Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
Daniel Richard				Schneidewend			
Inventor's Signature						Date	
Residence: City	Fishers	State	IN	Country	USA	Citizenship	USA
Post Office Address	11221 Tall Trees Drive						
Post Office Address							
City	Fishers	State	IN	ZIP	46038	Country	USA
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
Michael Joseph				McLane			
Inventor's Signature						Date	
Residence: City	Indianapolis	State	IN	Country	USA	Citizenship	USA
Post Office Address	720 Sherwood Drive						
Post Office Address							
City	Indianapolis	State	IN	ZIP	46240	Country	USA
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
Megan Louise				Brown			
Inventor's Signature	<i>Megan A Brown</i>					Date	3/2/00
Residence: City	Carmel	State	IN	Country	USA	Citizenship	USA
Post Office Address	11321 Rolling Springs Drive						
Post Office Address							
City	Carmel	State	IN	ZIP	46033	Country	USA

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → +

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
OMB control number.

+

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 2 of 2

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor				
Given Name (first and middle [if any])				Family Name or Surname				
<u>Mark Sheridan</u>				<u>Westlake</u>				
Inventor's Signature		<u>Mark Sheridan</u>			Date		<u>3/2/00</u>	
Residence: City		<u>Fishers</u>	State	<u>IN</u>	Country	<u>USA</u>	Citizenship	<u>USA</u>
Post Office Address		<u>11227 Knightsbridge Lane</u>						
Post Office Address								
City		<u>Fishers</u>	State	<u>IN</u>	ZIP	<u>46038</u>	Country	<u>USA</u>
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor				
Given Name (first and middle [if any])				Family Name or Surname				
Inventor's Signature					Date			
Residence: City			State		Country		Citizenship	
Post Office Address								
Post Office Address								
City			State		ZIP		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor				
Given Name (first and middle [if any])				Family Name or Surname				
Inventor's Signature					Date			
Residence: City			State		Country		Citizenship	
Post Office Address								
Post Office Address								
City			State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+

Serial No. 09/445,135

PATENT
RCA 88682IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Darrel Wayne Randall, Daniel Richard Schneidewend, Michael Joseph McLane, Megan Louise Brown and Mark Sheridan Westlake

Serial Number: 09/445,135

Filed: 12/3/99

For: SYSTEM AND METHOD FOR SORTING PROGRAM GUIDE INFORMATION

FILING OF MISSING REQUIREMENTS UNDER 35 U.S.C. 371 -
RESPONSE TO NOTICE TO FILE MISSING REQUIREMENTS

Hon. Assistant Commissioner of Patents and Trademarks
 Washington, D.C. 20231
 Box PCT


Sir:

In response to the Notification of Missing Requirements Under 35 U.S.C. 371, mailed January 27, 2000, in the above-identified application, Applicant hereby submits the following:

- 1) Executed Declaration of the inventor.
- 3) A surcharge of \$130.00 required under 37 CFR 1.16(e) for filing the Declaration on a date later than the filing date of the application.
- 4) A copy of Notice to File Missing Requirements Under 35 U.S.C. 371 (PCT/DO/EO/905).
- 5) A Petition for a two month Extension of Time.

Please charge the cost of the surcharge to Deposit Account No. 07-0832. Please charge any additional fees and credit any overpayments to Deposit Account No. 07-0832.

Respectfully submitted,
 Darrel Wayne Randall, Daniel Richard Schneidewend, Michael Joseph McLane, Megan Louise Brown and Mark Sheridan Westlake


 Frank Y. Liao
 Attorney for Applicant
 Reg. No. 40,065
 (609) 734-9497

04/07/2000 WCLAYERD 009:0054 JFC/33 09445.135

01 FD:154 130.00 CR

THOMSON multimedia Licensing Inc.
 P.O. Box 5312
 Princeton, NJ 08543-5312

DATE: March 8 2000, 2000Certificate of Mailing under 37 CFR 1.8

I hereby certify that this response to a Notice to File Missing Requirements, is being deposited with the United States Postal Service as first class mail in a postage paid envelope addressed to: Assistant Commissioner for Patents, Box PCT, Washington, D.C. 20231 on the date indicated below.

Date: 3/8/00 Signature: Marie E. Linke
 Marie E. Linke